

Application

7 degree-of-freedom anthropomorphic robot with compact joint arm design.

The Cobot is designed for flexible production lines with compact layout and high accuracy to allow precision assembly


Requirements

- Hollow shaft
- High precision
- Very Low profile
- Resistance to magnetic fields

Position Sensor

- Netzer VLX-60 Absolute Position Electric Encoder™ incorporated in the robotic arm with frame less motor and servo drive.
- Compact, low profile, lightweight & wide bore: Allowing high level integration for a low profile arm joint design.
- Frame-less & contact less with a negligible rotor weight: No mechanical parts operating, resulting in a long-lasting operational time, introducing no extra weight & inertia (load) to the system.
- Immune to magnetic interference: Can be very close to the frame less motor magnets.
- High resolution 19 bit & accuracy < 0.010deg for smooth and high accuracy rotation with high repeatability of 1 count.
- Standard digital Serial interfaces, SSI, BiSS.

Special safety algorithms with real time BIT (Built In Test) over SSI or BiSS

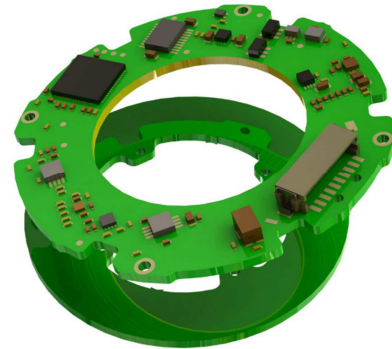

Product Features



● *Moving. Precisely. With You.*

Netzer Precision Motion Sensors Ltd. | Misgav Industrial Park, P.O. Box 1359 | D.N. Misgav, 2017400 Israel
Tel +972-4-999-0420 | global-info@netzerprecision.com | www.netzerprecision.com